

# 4-Ch. Turbo Serial-over-IP Card

# TC3847-3

- **Transports 4 Channels of RS-232 or RS-422 / RS-485 over Ethernet/IP**
- **Extremely Low Latency (Supports Teleprotection Relays)**
- **RS-232 Ports Support Hardware Handshaking or Synchronous Mode**
- **Data Rates up to 115kbps**
- **VLAN & QoS Support**
- **Temperature & Power Consumption Monitoring**
- **Extreme Temp (-40°C to +80°C) Optional**
- **Meets or Exceeds IEC 61850-3, IEEE 1613 & NEMA TS-2 Standards**
- **Member of JumboSwitch® Product Family**



TC3847-3 with Various JumboSwitch Cages and Chassis

**F**eaturing support for teleprotection relays, the TC3847-3 Turbo Serial Card transports four channels of RS-232 or RS-422/RS-485 or mix of both serial data over existing Layer 2/Layer 3 networks.

Specially designed to meet stringent real time requirements for protective relay communications in the power utility industry, this Turbo Serial interface card can perform at less than 3msec. latency, end-to-end, through an Ethernet network. This extremely low latency is irrespective of the protocol used, mirror bit\* or otherwise, and is unaffected by the number of nodes in between. In short, it's the fastest serial-over-IP solution for tele-protection currently available in the industrial marketplace today.

The TC3847-3 achieves minimal end-to-end processing delay (latency) by using high-performance buffering and forwarding technology. For reliable communications, the TC3847-3 supports VLAN and QoS for packet prioritization.

Key features include Traffic Monitoring and Statistics, Network Time Server (NTP Server), Remote Firmware Upgrade, Temperature and Power Consumption Monitoring.

Setup, diagnostics, and management are accessed via Web, SNMP, Serial Console, and Telnet. Diagnostics include LED indicators and local and remote loop back to assist with troubleshooting and maintenance.

The TC3847-3 interface card can fit into any available JumboSwitch housing option including 2S and 1U Standalone chassis and 2U/4U card cages. Power supply options are 12VDC, 24VDC, -48VDC or 115/230VAC. Standard operating temperature is -20°C to +70°C and the extreme temperature version is -40°C to +80°C.

\*NOTE - the term "Mirror Bit®" is a registered trademark of Schweitzer Engineering Laboratories Inc.

## Applications

Typical applications include extending serial data across IP networks.


For example, the TC3847-3 is often used to extend RS-232/RS-422/ RS-485 signals from one protection relay to another across Layer 2/Layer 3 Networks.

Specially designed to meet stringent real time requirements for protective relay communications in the power utility industry, this Turbo Serial interface card can perform at less than 3msec. latency, end-to-end, through an Ethernet network. This extremely low latency is irrespective of the protocol used, mirror bit or otherwise, and is unaffected by the number of nodes in between. In short, it's the fastest serial-over-IP solution for tele-protection currently available in the industrial marketplace today.

## Environmental & EMI Compliance

The JumboSwitch product family meets all pertinent industry-specific standards for environmental, performance and security requirements including IEC 61850-3, IEEE 1613, NEMA TS-2 and NERC CIP. Furthermore, future JumboSwitch family products will continue to be compliant with both existing and emerging industry standards and requirements, including developing Ethernet standards. Please refer to the charts below for specific standards compliance information.

	Tests	Industrial Standards	TC Communications - JumboSwitch Type Test and Levels	
			Power Supply Unit (PSU)	RJ-45 & Signal
Temperature/Humidity	Low Temperature Use	IEC 61850-3, IEEE 1613, NEMA TS-2	IEC 60068-2-1; Ae; -40°C; 16 hour	
	Low Temperature Storage	IEC 61850-3, IEEE 1613, NEMA TS-2		
	High Temperature Use	IEC 61850-3, IEEE 1613, NEMA TS-2	IEC 60068-2-2; Be; +80°C; 16 hour	
	High Temperature Storage	IEC 61850-3, IEEE 1613, NEMA TS-2	IEC 60068-2-2; Bd; +85°C; 16 hour	
	Damp Heat	IEC 61850-3, IEEE 1613, NEMA TS-2	IEC 60068-2-30; Db; +55°C; 95%; 96 hours	
Mechanical	Vibration	IEC 61850-3, IEEE 1613, NEMA TS-2	IEC 60068-2-6; Fc; 3 - 150 Hz; 7.5 mm; 2 g; 10 sweeps per axis	
	Shock	IEC 61850-3, IEEE 1613, NEMA TS-2	IEC 60068-2-27; Ea; 30g; 11ms	
ElectroMagnetic Compatibility	Electrostatic Discharge Immunity	IEEE 1613	IEC 61000-4-2; 8kV contact; 15 kV air	
	Radiated RF Immunity	IEC 61850-3, IEEE 1613	IEC 61000-4-3; 80 MHz - 1000 MHz; 20 V/m; AM 80% 1 kHz	
	EFT/Burst Immunity	IEC 61850-3, IEEE 1613	IEC 61000-4-4; 4 kV CM	IEC 61000-4-4; 4 kV CM
	Surge Immunity	IEC 61850-3	IEC 61000-4-5; 4 kV LG; 2 kV LL	IEC 61000-4-5; 4 kV LG; 2 kV LL
	Conducted RF immunity	IEC 61850-3	IEC 61000-4-6; 150 kHz - 80 MHz; 10 V; AM 80% 1 kHz	IEC 61000-4-6; 150 kHz - 80 MHz; 10 V; AM 80% 1 kHz
	Magnetic Field Immunity	IEC 61850-3	IEC 61000-4-8; 50 Hz; 100 A/m cont.; 1000 A/m 1 s	
	Damped Oscillatory Magnetic Field Immunity	IEC 61850-3	IEC 61000-4-10; 100 kHz; 30 A/m	
	Damped Oscillatory Magnetic Field Immunity	IEC 61850-3	IEC 61000-4-10; 1 MHz; 30 A/m	
Power Supply Unit (PSU) Variations	AC Voltage Dips	IEC 61850-3	IEC 61000-4-11; 30% & 100%, 0.5s	NA
	DC Voltage Dips	IEC 61850-3	IEC 61000-4-29; 40% & 70%, 0.1s	NA
	Damped Oscillatory Wave	IEC 61850-3	IEC 61000-4-12; 2.5 kV CM, 1.0 kV DM @1MHz	IEC 61000-4-12; 2.5 kV CM, 1.0 kV DM @ 1MHz
	Conducted PF CM Voltage	IEC 61850-3	IEC 61000-4-16; 50 Hz; 30 V cont.; 300 V 1s	IEC 61000-4-16; 50 Hz; 30 V cont.; 300 V 1s
	Conducted Emission	IEC 61850-3	CE/FCC/CISPR22 class A	CE/FCC/CISPR22 class A
	Conducted emission	IEC 61850-3	CE/FCC/CISPR22 class A	CE/FCC/CISPR22 class A
	Radiated emission	IEC 61850-3	CE/FCC/CISPR22 class A	
Dielectric	Dielectric 50 Hz Test	IEEE 1613	IEC 60255-5; 2 kV	IEC 60255-5; 0.5 kV
	Impulse Voltage Test	IEEE 1613	IEC60255-5; 5 kV	IEC 60255-5; 5 kV

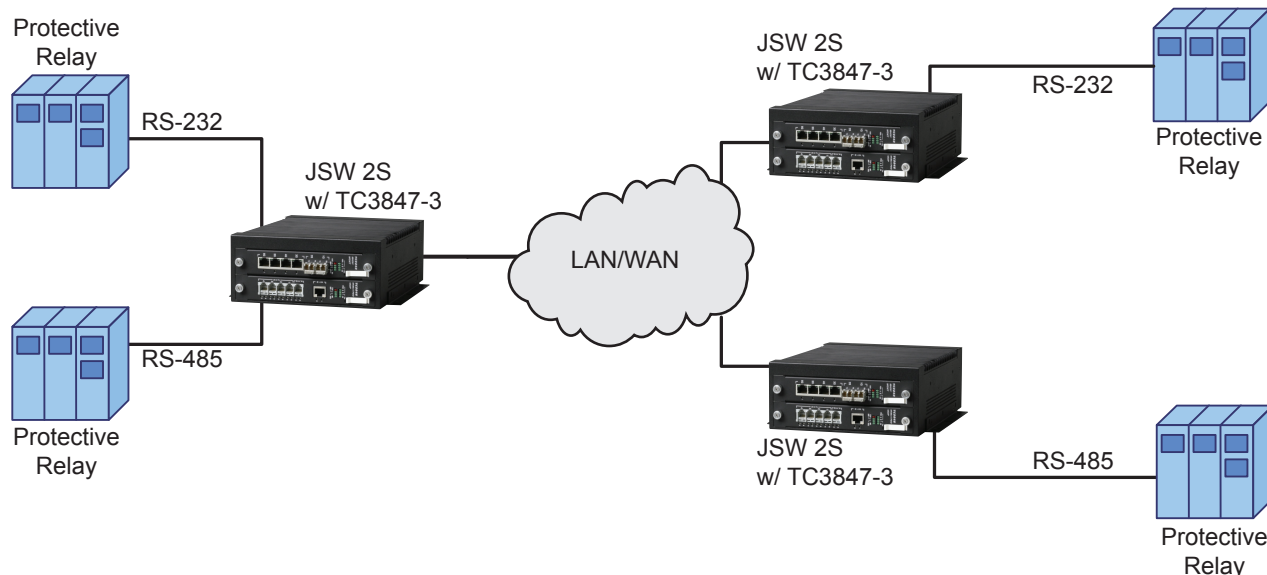

Typical Teleprotection Application using TC3847-3 4-Ch. Turbo Serial Card.

**Data Rates**

RS-232.....Up to 115.2Kbps  
 RS-422/RS-485.....Up to 115.2Kbps  
 Ethernet .....10/100Mbps Full Duplex  
 Console .....9.6K

**Connection Capacity**

RS-232 or RS-422/RS-485.....4 Ports  
 Ethernet.....1 Port

**Electrical**

**RS-232 Interface**  
 ESD Protection.....+/-15KV HBM  
 Connector .....RJ11

**RS-422 Interface**  
 Termination (optional)....100 Ohm  
 ESD Protection.....RJ11  
 Connector.....RJ11

**RS-485 Interface**  
 Termination (optional)....100 Ohm  
 ESD Protection.....+/-15KV HBM  
 Connector.....RJ11

**Ethernet Interface**  
 Standards .....IEEE 802.3,  
 .....802.3u, 802.1p&Q  
 Connector.....RJ45  
 Console Port.....RJ45

**Regulatory Approval**

CE, FCC Part 15, CISPR, CLASS A, IEC 61850-3, IEEE 1613, NEMA TS-2

**System**

Bit Error Rate .....1 in 10<sup>10</sup> or Better

**Diagnostic Functions**

Local and Remote Loopback for Serial and Ethernet

**LEDs**

Unit Status.....PWR (A, B), Alarm  
 .....Vcc, BP, MGM  
 Channel.....Status  
 Ethernet.....Link/Act

**Power**

Standard.....12VDC  
 Optional.....24, -48 VDC  
 .....90-260 VAC, 50/60Hz  
 Power Consumption.....<10W

**Operating Temperature**

Bit Error Rate .....1 in 10<sup>10</sup> or Better  
 High Temp .....-20°C to 70°C  
 Extreme Temp .....-40°C to 80°C

**Storage**

Temperature.....-40°C to 90°C  
 Humidity.....95% non-condensing

**Physical (rack mount card)**

Height.....(3.15 cm) 1.24"  
 Width.....(17.78 cm) 7.0"  
 Depth.....(22.86 cm) 9.0"  
 Weight.....(0.3kg)0.75lbs



ISO 9001  
 QMI-SAI Global  
 #1045959

TC Communications, Inc.  
 17881 Cartwright Road  
 Irvine, CA 92614 U.S.A.  
 Factory Tel: (949) 852-1972  
 Fax: (949) 852-1948

Sales Office  
 U.S.A. Domestic International:  
 (800) 569-4736 (949) 852-1973

Web Site: www.tccomm.com  
 E-mail: sales@tccomm.com

Note - Information contained in this data sheet is subject to change without prior notice. 010E